


Designations, Load Index & Speed Rating

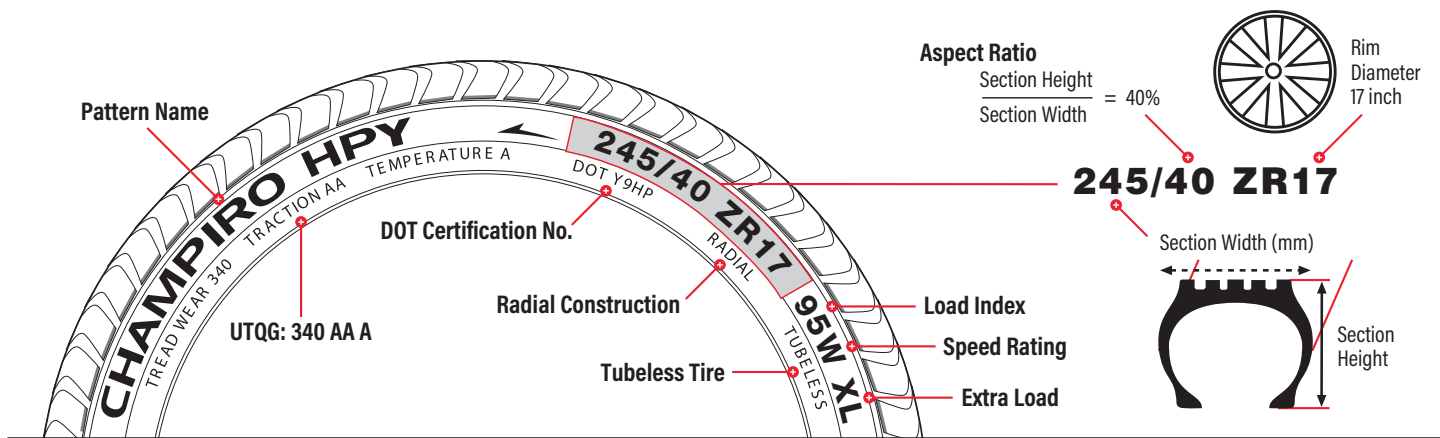

Before fitting, it is essential to check the different markings to ensure that the tire meets the maximum load and speed possibilities and/or the regulations in force.

SAFETY WARNING

1. Never inflate beyond 40PSI (275kPa) to seat beads.
2. Tires should always be installed by qualified technicians following USTMA (formerly RMA) installation procedures.
3. Never mount tires on rims which are damaged or not smooth and clean.
4. Never mount a tire with a torn bead.
5. Never inflate a tire that is lying on the floor or other flat surface.
6. Always use a tire mounting machine with hold-down device or safety cage, or bolt to vehicle axle.

MOUNT ONLY ON A RIM OF EXACT SAME DIAMETER AS THE TIRE.

Speed Rating System

SR	MPH	KM/H
B	31	50
C	37	60
D	40	65
E	43	70
F	50	80
G	56	90
J	62	100
K	68	110
L	75	120
M	81	130
N	87	140
P	93	150
Q	100	160
R	106	170
S	113	180
T	118	190
U	124	200
H	130	210
V	149	240
W	168	270
Y	186	300
(Y)	Above 186	Above 300

Load Capacity Index

LI	LBS	KG	LI	LBS	KG
67	677	307	101	1819	825
68	694	315	102	1874	850
69	716	325	103	1929	875
70	739	335	104	1984	900
71	761	345	105	2039	925
72	783	355	106	2094	950
73	805	365	107	2150	975
74	827	375	108	2205	1000
75	852	387	109	2271	1030
76	882	400	110	2337	1060
77	908	412	111	2403	1090
78	937	425	112	2469	1120
79	964	437	113	2535	1150
80	992	450	114	2601	1180
81	1018	462	115	2679	1215
82	1047	475	116	2756	1250
83	1073	487	117	2833	1285
84	1102	500	118	2910	1320
85	1135	515	119	2998	1360
86	1168	530	120	3086	1400
87	1201	545	121	3197	1450
88	1235	560	122	3307	1500
89	1279	580	123	3417	1550
90	1323	600	124	3527	1600
91	1356	615	125	3658	1650
92	1389	630	126	3748	1700
93	1433	650	127	3858	1750
94	1477	670	128	3968	1800
95	1521	690	129	4079	1850
96	1565	710	130	4189	1900
97	1609	730	131	4299	1950
98	1653	750	132	4409	2000
99	1764	775	133	4542	2060
100	1819	800	134	4674	2120

Load Capacity Index

Load Range	Ply Rating	Load Range	Ply Rating
A	2	G	14
B	4	H	16
C	6	J	18
D	8	L	20
E	10	M	22
F	12	N	24